


INSTRUCTION MANUAL

RECHARGEABLE STAND FAN
AC/DC OPERATED
RECHARGEABLE FAN
WITH LED NIGHT LIGHT

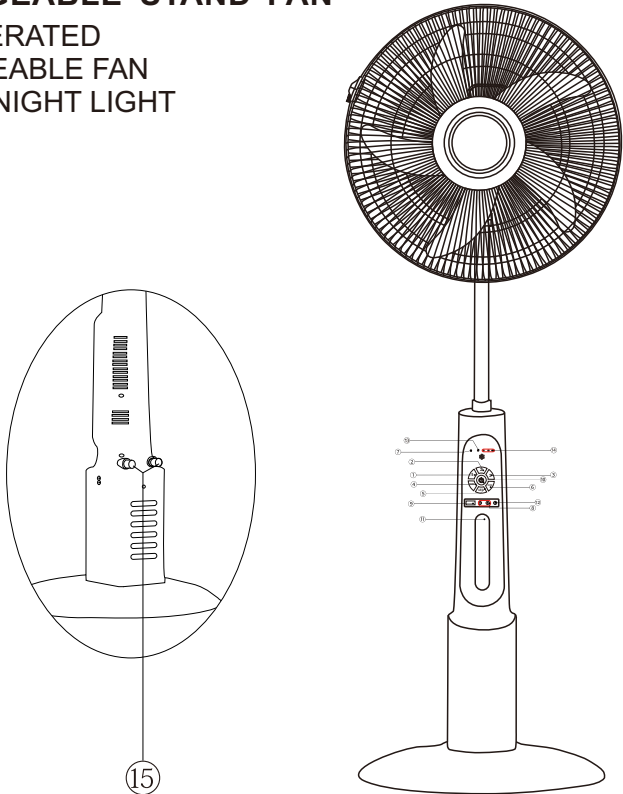

- ① Low Speed

② Intermediate Speed

③ High Speed

④ Shake Head

⑤ LED Light
- ⑥ Timing Function

⑦ Charging Indicator

⑧ 2*12V DC Output

⑨ USB 5V Output

⑩ ON/OFF Button
- ⑪ LED Light

⑫ DC 15V Input Port

⑬ Power Indicator

⑭ Power Level

⑮ External Battery

Thank You For Using Our Product,Please Read The Instruction Manual Carefully Before Initial Use.

ATTENTION


- 1.Please read this instruction before first use.
- 2.AC 110V-240V voltage working available.
- 3.When the led gets dim, please recharge the product.
- 4.Charge at least once in every 3 months for 8hours even when the appliance is not in use.
- 5.Please keep the fan switch in OFF status when not in use.
- 6.Suitable operating ambient humidity level is 0 °C~40°C.
- 7.Avoid using in water or moist.

HOW TO OPERATE


1. Connect with home electricity (AC 110V-240V), both working and charging battery
2. When AC power off it works on battery power continually
3. If fan equipped with solar panel then charge by solar panel available when emergency

FUNCTION:

- 1,2,3: Wind speed control;
- : Turn on or Turn Off The Fan;
- TURN: Turn around control;
- 0.5H: Timing 30 minutes
- LED: Turn On Or Turn Off LED Light



COMBINATION DIAGRAM

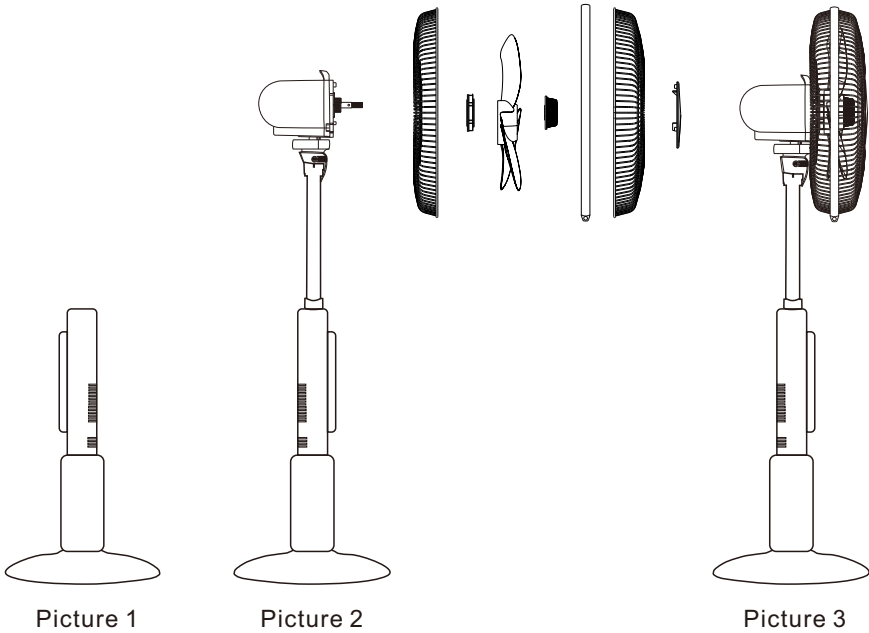

正面

HOW TO ASSEMBLE THE FAN

- 1.Use bend bolt fix the base and fix the lift pole with machine body in Picture 1
- 2.Fix all parts as shown in Picture 2. But knob of blade must be fixed anti clockwise.
- 3.As shown in Picture3, fan is complete.

HOW TO CHANGE THE BATTERY

- 1.Loosen the fixing screw on the battery cover.
- 2.Take out the battery cover.
- 3.Pull out the battery terminal and take out old battery.
- 4.Put inside the new battery, and connect ‘+’ to red cord, to black cord, must follow it.
- 5.Put the cover and tighten the screw.


HOW TO CHARGE THE FAN

AC CHARGE:

- 1.Please ensure that the voltage indicated on the appliance corresponds with the mains voltage.
- 2.Plug in the cord to AC socket.
- 3.Red indicator shows that the battery is getting charged.
- 4.It is a normal phenomenon of slight heat while charging the battery.


SOLAR PANEL CHARGE:

- 1.Please the solar panel in a sunny place, Adjust the panel to maximize the power. (let the panel perpendicular to the sun light at 45-90 degree.)
- 2.Connect the solar panel to your device using the multi head USB cable.

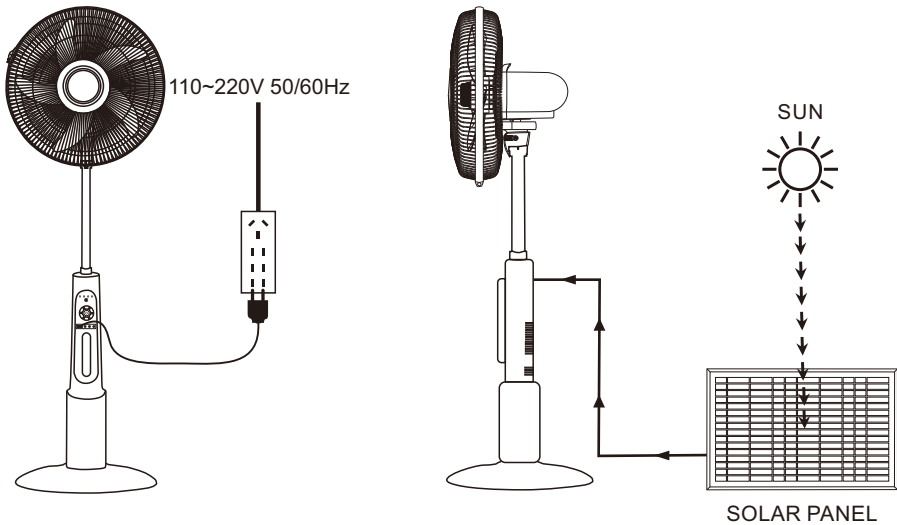

SPECIFCATIONS:

Fan Blade Size:	16/18 Inch
Material Science:	Metal Grill
LED QTY:	15 Pcs 0.5W LED Night Light
Battery:	12V 7Ah Lead Acid Battery
DC Output:	12V
USB Output:	5V
Charging Time:	13Hours
AC Input:	AC 110~240V 50/60Hz
DC Input:	15V
Working Time:	6Hours For High Speed;45Hours For Low Speed

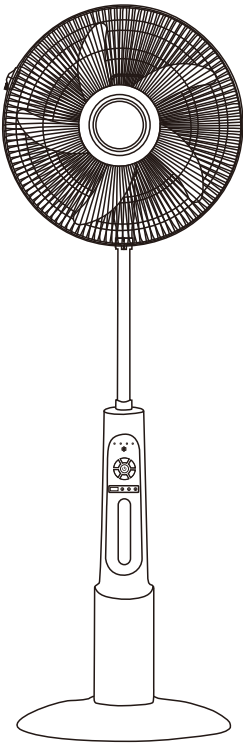

⚠It should be taken by children under the adults' instruction

反面